

Company Name: LUMILIFE LIGHTING & ELECTRICAL LLC

Contact Number: +971 4554 7177,

Address: 1904,19th floor, Palace towers T1,Silicon Oasis,Dubai, UAE

Mail id: info@lumilife.ae

Website: www.lumilife.ae



APP Control



Voice Function



Timing Function



Share Device

SMART HOME ٢٠٢٥





CONTENTS




Smart Door Lock	01 - 16
Smart Module Switch	17 - 20
Smart Thermostat Valve	21 - 30
Smart Control Panel	31 - 34
Smart Sensor	35 - 48
Smart Gateway	49 - 50
Smart Camera	51 - 72
Smart Power Strip	73 - 86
Smart Plug	87 - 100
Wifi Smart Switch	101 - 118



S1

Quick access with fingerprint with low false recognition rate, good for old man or kids




Smart Life Tuya



MSL-S1

Keyless Smart Cylinder

No breaking the door or change the door body.

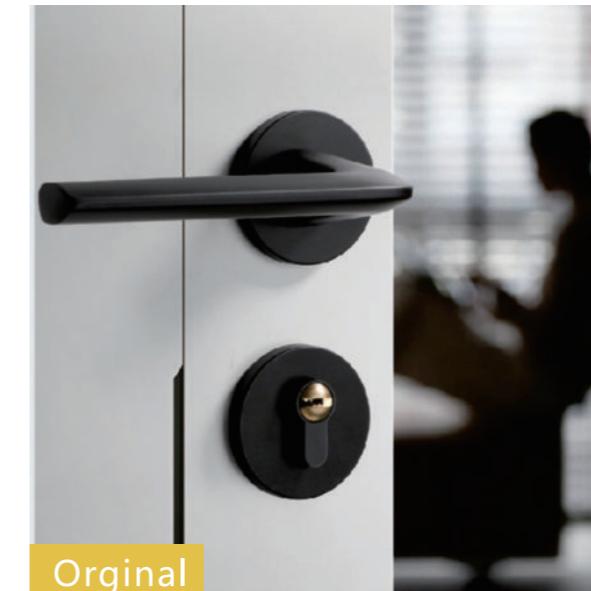

Orginal





Replace

Product Parameters

Reader Dimension:	42x42mm
Power Source:	1 x CR123A(Alkaline)
Material:	Aluminum Alloy/Brass
Installation:	Intermediate;Tools required(Included)
Unlock Way:	App,Fingerprint,Keycard,Manual key
IP Class:	IP5x(Dust and Splash Proof)
Emergency Power:	1x Micro Type-C charging port
Door Thickness:	35-45mm

Dimension



4 Ways to unlock



Fingerprint



IC Card



Tuya APP




Key

Show the situation outside the door




Camera Smart Lock

ME-098

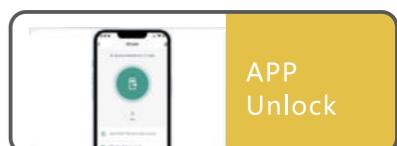

PRODUCT PARAMETERS


Model:	E908
Material:	Curved tempered glass aluminum alloy
Color:	● Black
Unlock Way:	Fingerprint/Password/card//APP/key
Cylinder:	C Level
Power Supply:	8 AA batteries
Available Door:	Wood door/Security door /Bronze door/Iron door
Available Thickness:	40MM~80MM
Unlock Direction:	Universal for left/right
Lock Size/with rubber:	370*75mm/373x78mm

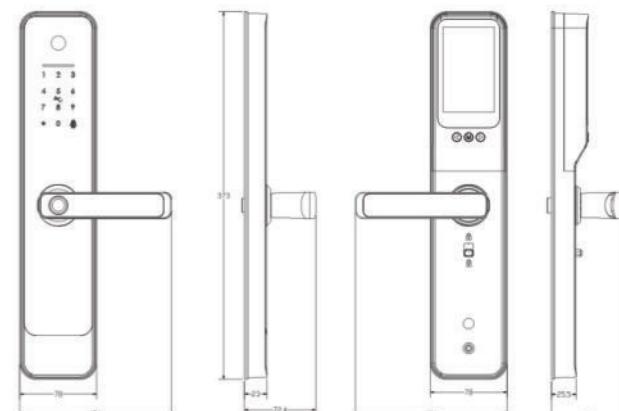



Features:


- * Front panel size: 420mm x 76mm x 65mm
- * Rear panel size: 420mm x 76mm x 65mm
- * Suitable door thickness: 40-120mm
- * Material: carbon steel+aluminum alloy
- * Process: Electric spray
- * Painting Color: matte black
- * Key type: capacitive touch screen
- * Key material: tempered glass

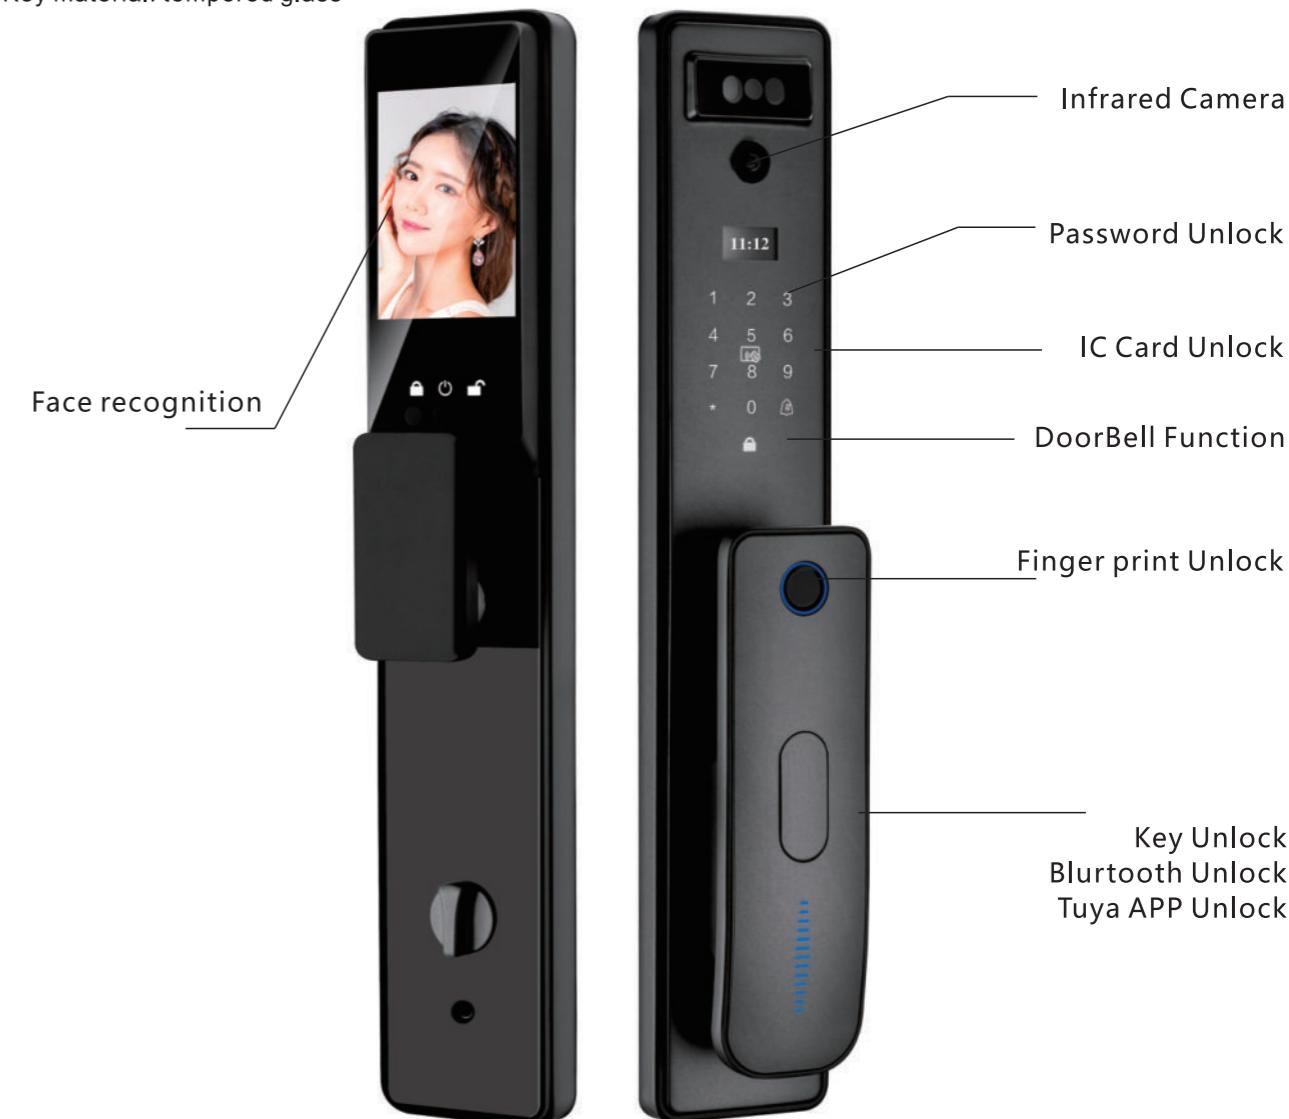



Smart Lock

M-H168

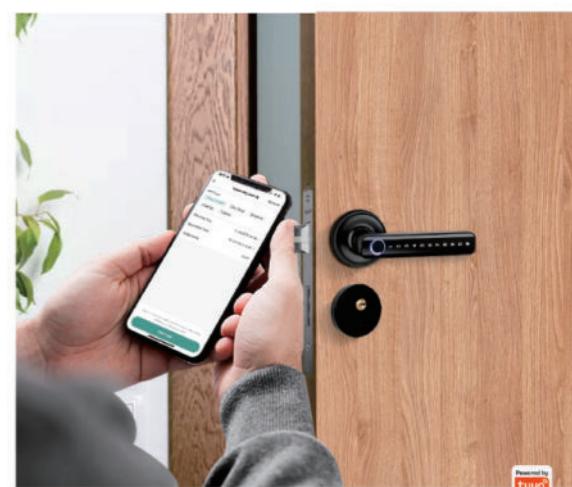

Model:	H168	Material:	Aluminum Alloy+PC+Acrylic
Color:	<input checked="" type="radio"/> Black	Unlock Way:	Fingerprint/App/Password
Cylinder:	C Level	Power Supply:	4 pcs AAA batteries
Fingerprint capacity:	50	Passcode:	No limit cyclic
Available Door:	Wood/Steel	Available Thickness:	35mm-55mm
Unlock Direction:	Universal for left/right	Emergency Power:	MicroUSB
Product Dimension:	147x71x71mm		

Semi-conductor Fingerprint Sensor 360 Degree Recognition

Quick access with fingerprint with low false recognition rate, good for old man or kids

0.3 s **50** USERS
Quick Recognition Large capacity user



II

Technical parameters



100 PCS

fingerprint capacity

0.1%

rejection rate

400 PCS

password + ic card

APP

half year unlock record



R5

Features:

- *Smart Bluetooth Rim Lock,
- *Work with App/Passcode/Fingerprint
- *Aluminum alloy material
- *Black nickel treatment
- *Work with alkaline battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with tuya wifi technology



D6F-BN

Features:

- *Smart Bluetooth Knob Lock
- *Work with bluetooth App/Passcode/Fingerprint
- *Aluminum alloy material
- *Black nickel treatment
- *Work with 60 single latch/5572 mortise
- *Work with alkaline battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with bluetooth technology
- *Support remote passcode change
- *Available for WIFI hub for remote management(optional)




Smart Lock



K3

Features:

- *Smart tuya Bluetooth Key box
- *Zinc alloy housing
- *Black nickel treatment
- *Patent structure for the motor mechanism
- *Work with 4pcs AAA alkaline battery
- *Micro USB port for emergency charging
- *Work with bluetooth technology
- *Support remote passcode change
- *Available for remote unlock with gateway

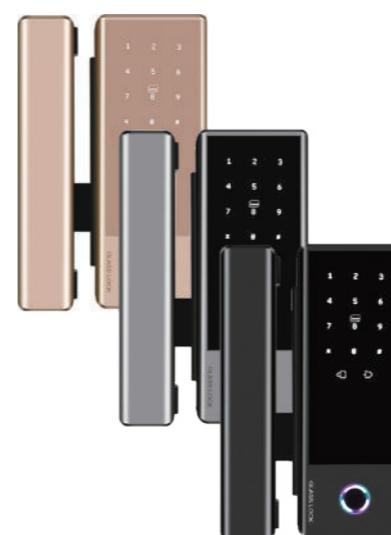


JD-S1

Features:

- *Smart Bluetooth Glass Lock
- *Work with bluetooth App/Passcode/Fingerprint
- *Zinc alloy material
- *Black nickel treatment
- *Work for glass door 10-15mm
- *Work with alkaline battery
- *200,000 times life test
- *Work with bluetooth technology
- *Support remote passcode change
- *Available for WIFI hub for remote management(optional)

FACE RECOGNITION SMART LOCK

Soft Touch Unlock Remote Management



3D Face



Smart Lock

i9

Features:

- *Smart Tuya Camera Auto Lock
- *3D Facial recognition technology
- *With camera monitoring(1000,000 pixel)
- *With fingerprint sensor
- *Aluminum alloy panel and Japan IML technology
- *Gray nickle treatment
- *Work with 60-68 security gear mortise
- *Support fingerprint/face/Password/IC card
- *Work with super power lithium battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with tuya Wi-Fi technology
- *Support dynamic password and remote unlock



i10

Features:

- *Smart Tuya Camera Auto Lock
- *3D Facial recognition technology
- *With camera monitoring(1000,000 pixel)
- *With fingerprint sensor
- *Aluminum alloy panel and IML technology
- *Gray nickle treatment
- *Work with 60-68 security gear mortise
- *Support fingerprint/face/Password/IC card
- *Work with super power lithium battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with tuya Wi-Fi technology
- *Support dynamic password and remote unlock



FACE RECOGNITION SMART LOCK



Smart Lock



i13

Features:

- *Smart Tuya Camera Auto Lock
- *3D Facial recognition technology
- *With camera monitoring(1000,000 pixel)
- *With fingerprint sensor
- *Aluminum alloy panel and IML technology
- *Gray nickle treatment
- *Work with 60-68 security gear mortise
- *Support fingerprint/face/Password/IC card
- *Work with super power lithium battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with tuya Wi-Fi technology
- *Support dynamic password and remote unlock



A216-BN

Features:

- *Smart Tuya Camera Auto Lock,IP64 waterproof
- *3D Facial recognition technology
- *With digital door viewer, support photo capture and video talking
- *With fingerprint sensor
- *Aluminum alloy panel
- *Black nickle treatment
- *Work with 60-68 security gear mortise
- *Support face recognition/ fingerprint/face/Password/IC card
- *Work with super power lithium battery
- *Emergency key for backup use
- *200,000 times life test
- *Work with tuya Wi-Fi technology
- *Support dynamic password and remote unlock

Model M/Wi-Fi



Smart Module Switch

Remote Control Voice Control
Set Schedule Electricity Monitoring




M-1CH
1 Gang Switch




M-2CH
2 Gang Switch




M-3CH
3 Gang Switch



M-4CH
1 Gang Switch



M-1CM
1 Gang Curtain Switch

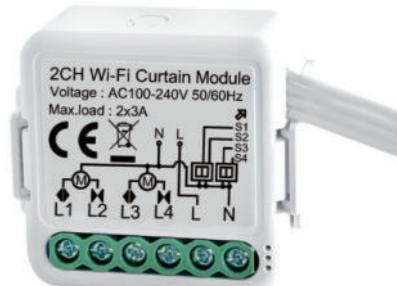

M-2CM
2 Gang Curtain Switch






M-1DM
1 Gang Dimmer



M-2DM
2 Gang Dimmer



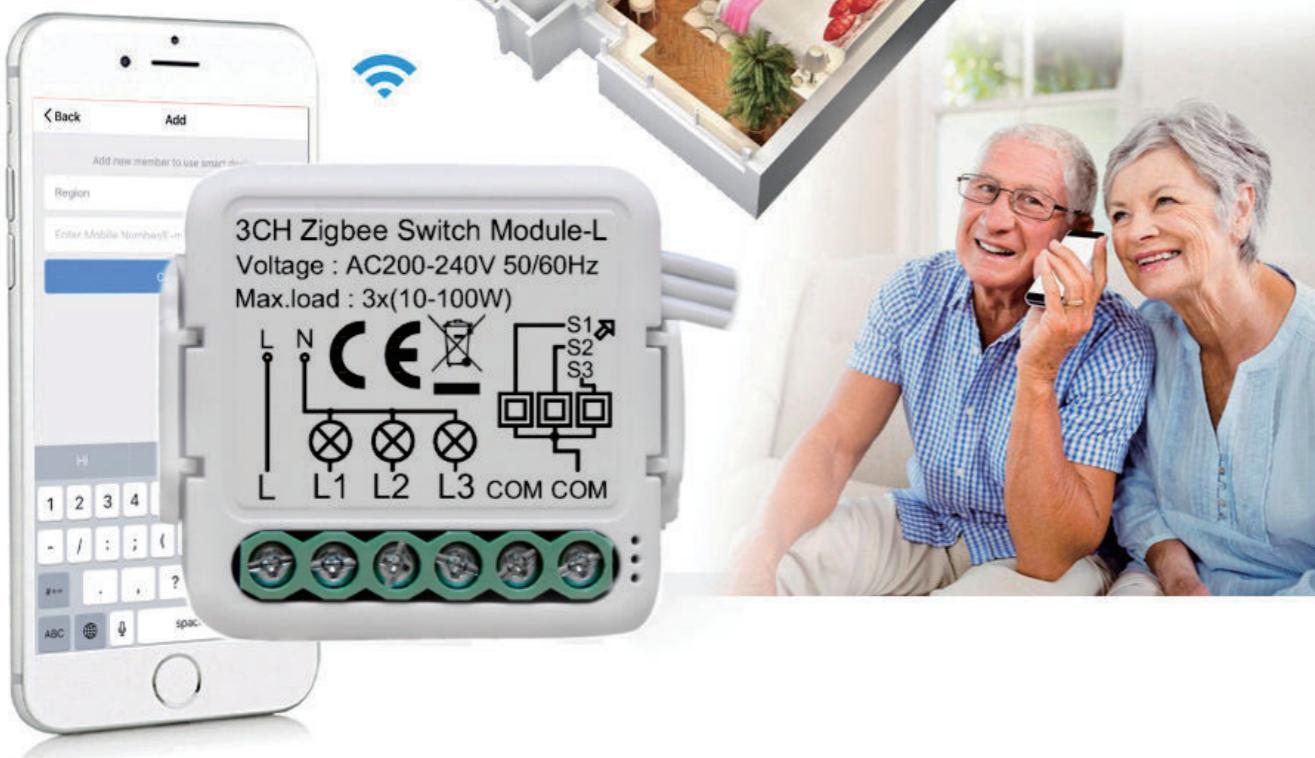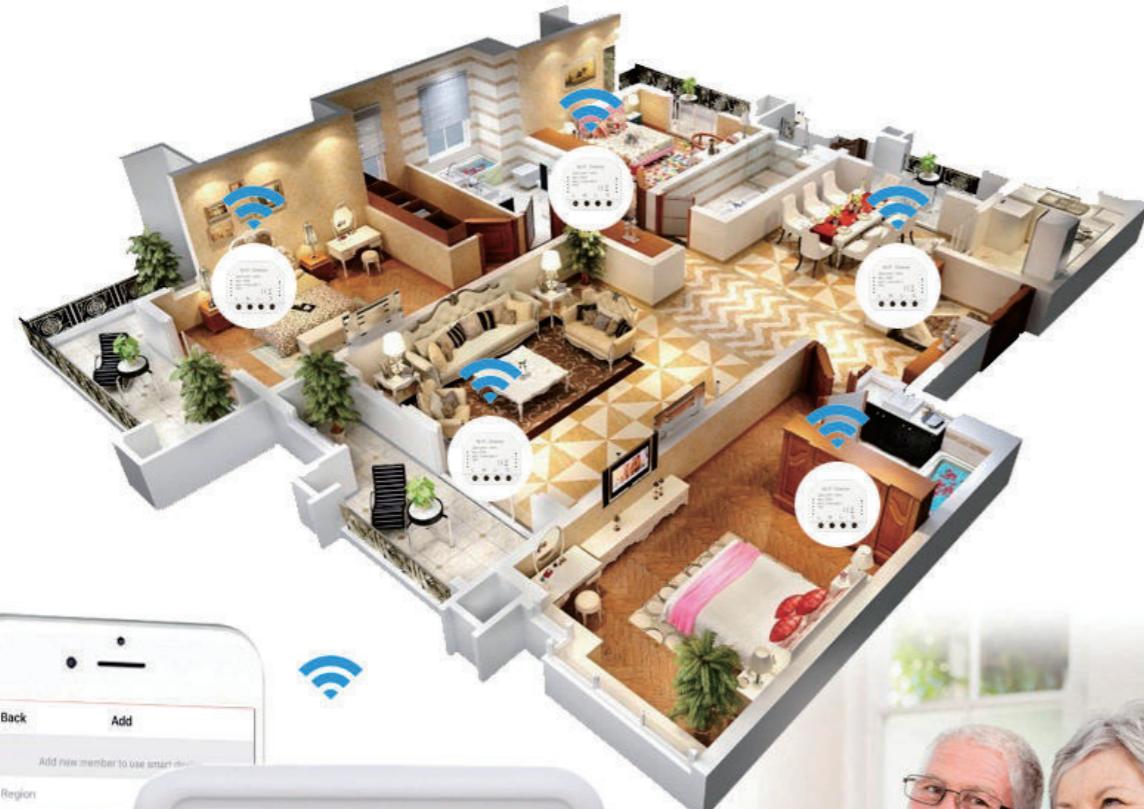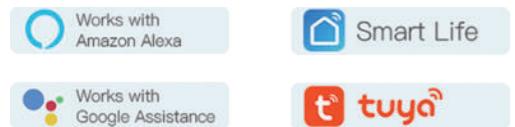

Smart Module Switch


Remote Control Voice Control
Set Schedule Electricity Monitoring



MZ-1CH
1 Gang Switch



MZ-2CH
2 Gang Switch

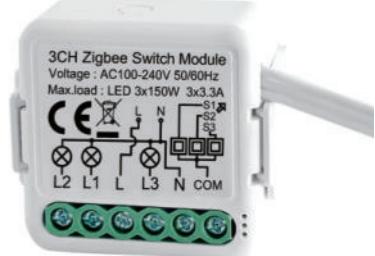

MZ-3CH
3 Gang Switch




MZ-4CH
4 Gang Switch



MZ-1DM
1 Gang Dimmer



MZ-2DM
2 Gang Dimmer




MZ-1CM
1 Gang Curtain



MZ-2CM
2 Gang Curtain



MZ-1CH-L
1 Gang Switch Single Live



MZ-2CH-L
2 Gang Switch Single Live



MZ-3CH-L
3 Gang Switch Single Live

Model MZ/Zigbee



Smart Module Switch

Model MZ/Zigbee

Remote Control Voice Control
Set Schedule Electricity Monitoring



1Gang - Grey



2Gang - Grey



3Gang - Grey



4Gang - Grey



1Gang - White



2Gang - White



3Gang - White



4Gang - White



1Gang - Gold



2Gang - Gold



3Gang - Gold



4Gang - Gold



1Gang - Black



2Gang - Black



3Gang - Black



4Gang - Black



Smart Thermostat Valve

MTV03



MTV01



MTV02



MTV05



MTV04




Smart Thermostat

M8000C



Efficient Customization One-stop Procurement

Temperature controller manufacturer

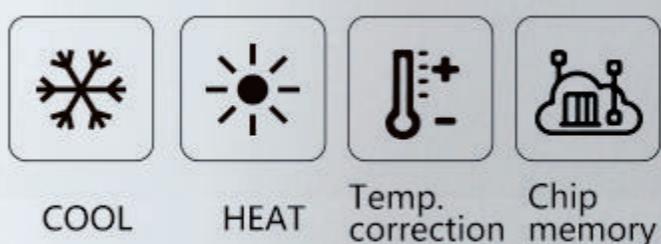

White



Black



Grey

4.8" Screen Remote Control

Screen size	Visible thickness	Heat emission hole
4.8 "	2cm	54pc
Power Supply	24VDC/AC +10%	
Current Load	1A (Inductive) 3A (Resistance)	
Sensor	NTC3950, 10K	
Set Temp. Range	42-212 °F (5-99°C)	
Accuracy	±1 F	
Display Temp. Range	41-210 °F (5-99°C)	
Ambient Temp	32-113 °F (0-45°C)	
Ambient Humidity	5-95%RH(Non Condensing)	
Storage Temp	23-113°F (-5-45°C)	
Timing Error	<1%	
Power Consumption	<1.5W	
Shell Material	PC+ABS(Fireproof)	
Available Installation 1	Wall mounted	
Available Installation 2	Distance of 62±5mm (Europe, China and Japan)	
Available Installation 3	Hole Distance of 86±3mm (USA and Italy etc.)	
Wire Terminals	Wire 2x1.5mm ² or 1x2.5mm ²	
Protection Class	IP20	
Buttons	Capacitive Touch Buttons	



Smart Thermostat

Thermostat



MEMORY PROTECTION



MHT0006



MHT0003



Smart Thermostat

Thermostat



MLCD-B2



MLED-B12



Smart Knob Thermostat

MBH7000



Smart Knob Thermostat

Suitable for water and electricity boiler heating system

TFT true color screen . Knob temperature control
Nine categories of options control



Satin Silver



Stand By Screen



Master Control



Satin Gold



Satin Black



Control Panel

F8 - background music and Tuya IOT



F6 - background music and Tuya IOT



F7 - background music and Tuya IOT



F10 - background music and Tuya IOT



- Support and control TUYA intelligent ecological chain equipment
- Support TUYA application addition
- Personalized screen saver settings
- Timing switch
- Support customization



F3 - PRO

- 86 Into the wall type hidden installation structure, easy installation mode, no need to transform the wall, any collocation.
- Smart home interconnection, situational mode, device automation, remote APP control.
- It can easily realize the precise control of intelligent devices such as lights, curtains, air conditioners, etc., without hands, compatible with some TUYA ecological devices.
- You can customize a linkage scenario to quickly change the scenario mode.



KG056-W

- 3.5 inch 480*320 IPS Screen
- BLE Mesh Gateway
- Camera Viewer
- Built-in IR
- Security Alarm



Zigbee Combustible Gas Sensor



MV09270

- When detected gas leakage will alarming and send out signal to gateway.
- Working Voltage: AC85V-250V
- Average Consumption: $\leq 1.5W$
- Alarm Sound: 70db (1meter)
- Alarm Density: $7\%LEL \pm 3\%LEL$ (CH4)
- Zigbee standard :IEEE802.15.4
- Zigbee working frequency: 2.400GHz-2.484GHz



Zigbee PIR Motion Sensor



MV09266

- USB Input voltage: DC5V/ 2A
- Battery Input voltage: DC3V Lr03
- Static Current: $\leq 35\mu A$
- Working current: $\leq 15mA$
- Low-voltage notification: $\leq 2.4V$
- Zigbee operating frequency: 2.400GHz-2.484GHz
- Detecting Distance: 6M
- Detecting Angle: 360°Ceiling Mounted
- Working Temperature: $-10\sim +50^\circ C$



Zigbee Water Leakage Detector



MV09271

- When detected water leakage will send out signal to gateway.
- Input Voltage: DC3V CR123A
- Standby Current: $\leq 10\mu A$
- Alarm Current: $\leq 75mA$
- Low-voltage: $\leq 2.5V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection method: Water detection
- Working Temperature: -10- +50°C
- Working Humidity: $\leq 95\%RH$

Zigbee Smoke Detector



MV09269

- When detected smoke leakage will alarming and send out signal to gateway.
- Input voltage: DC3V Lr03
- Quiescent current: $\leq 35\mu A$
- Working current: $\leq 100mA$
- Low voltage and under-voltage: $\leq 2.4V$
- Alarm sound pressure: 85db/1m
- Zigbee standard: IEEE802.15.4
- Working frequency: 2.405 ~ 2.480GHZ
- Detection range: 20m²



Smart Sensor

Zigbee Temperature Humidity Sensor



Mv09268



- Product parameter: DC3V Lr03
- Quiescent current: $\leq 10\mu A$
- Alarm current: $\leq 15mA$
- Low voltage and undervoltage: $\leq 2.6V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: $-10^{\circ}C \sim +60^{\circ}C$
- Detection humidity: 0-100%RH
- Working temperature: $-10-50^{\circ}C$
- Working humidity: maximum 95%RH



MV09267



- Product parameter: DC3V Cr2450
- Quiescent current: $\leq 10\mu A$
- Alarm current: $\leq 15mA$
- Low voltage and undervoltage: $\leq 2.6V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature: $-10^{\circ}C \sim +60^{\circ}C$
- Detection humidity: 0-100%RH
- Working temperature: $-10-50^{\circ}C$



MV08229

Zigbee Human Motion Sensor

Detection distance : 7-10M
 Detection angle : Wide angle 120°
 Battery: 3V Cr2450
 Operating Temperature : -10°C-55°C
 Working humidity : 10%-90%RH (Non-condensing)
 Main function : Intelligent linkage
 Wireless Standard : WIFI802.11b/g/n Zigbee802.15.4
 Housing material : ABS



MV09272

Wi-Fi Combustible Gas Sensor

Input voltage: AC 85V-250V
 WiFi Standard: 802.1 1b/g/n
 Alarm concentration: 6% LEL ± 3% LEL (Ch4)
 Average Consumption: ≤1.5W
 Alarm Sound: 70dB/m
 Working Temperature: -10°C -- + 50°C
 •Working Humidity: ≤95%RH
 •Product Size: 55*48*30mm



CO400A

WiFi Carbon Monoxide Detector

Input Voltage: DC3V LR6-AA*2
 Static Current: ≤55uA
 Alarm Current: ≤160mA
 Low Voltage: ≤2.4V
 Wi-Fi: 802.11b/g/n
 Detectable Gas: Carbon Monoxide(CO)
 Alarm set value: 128ppm (±50ppm)
 Alarm Sound: ≥70dB/1M
 Alarm Mode: Sound and flash Alarm
 Installation Method: Wall Mounting
 Working Temperature: -10°C to 55°C
 Working Humidity: Up to 95% RH



MV08917

Wi-Fi Smoke Detector

Power supply : DC9V alkaline battery (6LR61)
 Static current : <10uA
 Alarm current: <100mA
 Working temperature : 0°C ~ +50°C
 Humidity : ≤95%RH , no freezing
 Alarm sound : >80dB
 Low battery alert : ≤7.0V±0.2V



Wi-Fi Door Window Sensor MV08362

Battery: LR03-1.5V/AAA*2 (Alkaline battery)
 Battery Life: 6000 times trigger Standby
 Current: 8uA Alarm
 Current: 70mA ~ 120mA Wireless
 Type: 2.4GHz Wireless
 Standard: IEEE 802.11b/g/n
 Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
 Working Humidity: 20% ~ 85% RH
 Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)



Zigbee Door Window Sensor MV09265

Input voltage: DC3V LR03*2
 Standby current: ≤10uA
 Alarming current: ≤15mA
 Low-voltage notification: ≤2.5V
 Zigbee frequency: 2.400GHz-2.484GHz
 Magnetic control distant: ≥15mm
 Working temperature: -10-50°C



Wi-Fi Temperature & Humidity Sensor with LCD Screen

Smart Sensor



MV08062 WIFI/Zigbee



S09 WIFI

Wi-Fi IR Remote Control Sensor

- * 360° Full Range Coverage
- * Mobile Phone Remote Control
- * Support Smart Voice Speaker
- * Support Timer Function
- * Smart Learn Function & DIY




MV08360A



MV08360B



MV08360C

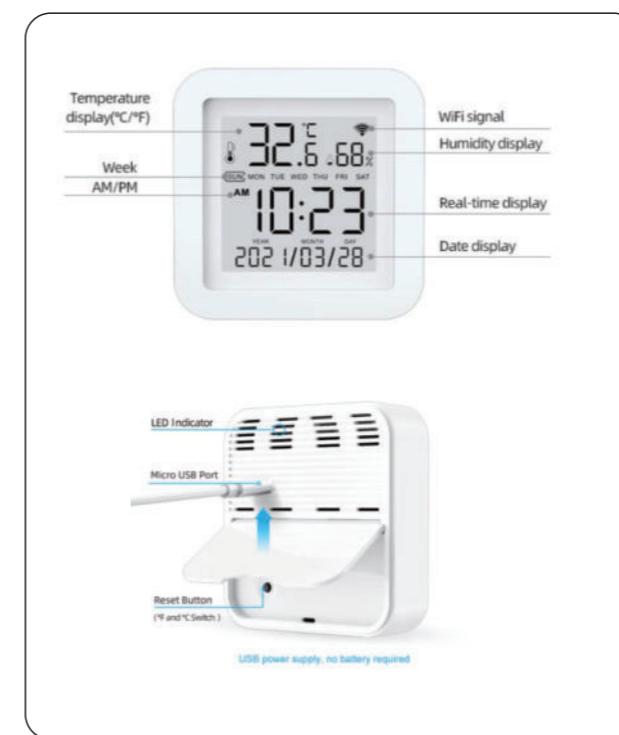

Size: 65*65*17mm

Micro Input: DC 5V/1A

LED Indicator: Blue

Wi-Fi Protocol: 2.4GHz

Wi-Fi Stand: IEEE802.11 Bb/g/n

Temperature Measure Range: 0°C~60°C

Tempearture Accuracy: ±1°C

Size: 65*65*17mm
Micro Input: DC 5V/1A
LED Indicator: Blue
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE802.11 Bb/g/n
Temperature measure range: 0°C~60°C
Temperature Accuracy: ±1°C



Smart Water Sensor

MV08735

Battery: LR03-1.5V/AAA*2 (Alkaline battery)
 Battery Life: 6000 times trigger
 Standby Current: 8uA
 Alarm Current: 70mA ~ 120mA
 Wireless Type: 2.4GHz
 Wireless Standard: IEEE 802.11b/g/n
 Working Temperature: 0°C ~ 40°C (32°F ~ 104°F)
 Working Humidity: 20% ~ 85% RH Storage
 Temperature: 0°C ~ 60°C (32°F ~ 140°F)
 Storage Humidity: 0% ~ 90% RH
 App: Tuya smart or Smart life
 Supports: Android 4.4 and iOS 8.0 or newer
 Size: Sensor: 71mm x 25mm x20 mm S
 Sensor Cable: 1m
 Material: ABS
 Patent No.: 201930649295.9




PIR Motion Sensor



MV08361

Wi-Fi Connection / High accuracy / Large detection range

Size: 70*45*35.6mm
 Battery: LR6-1.5V/AA*2(Alkaline battery)
 Micro Input: DC 5V/1A Detect Angle: 128°
 Detect Distance: ≤8m
 WiFi Type: 2.4GHz
 WiFi Standard: IEEE 802.11 b/g/n
 Working Temperature: 0°C~50C
 Working Humidity: 10%~85% RH
 App: Tuya Smart or Smart Life
 Support Android 4.4+or iOS 8.0+ version Includes Micro charging cable, adhesive tape and screws

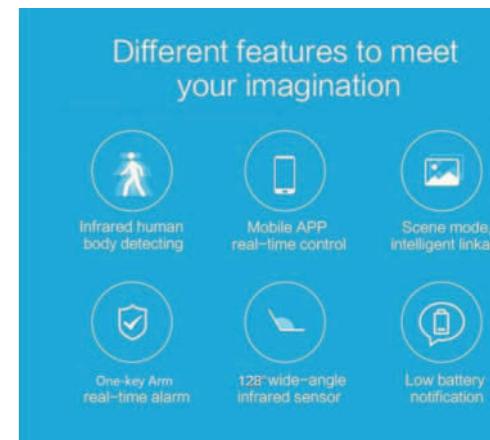



Smart Zigbee Wireless Gateway

MZG01

Product specifications

Appearance size :61*61*15mm
Weight: Net Weight 33g
Status indicator :1 Power indicator,1 Network indicator
Operation buttons :1 button (reset)
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
IEEE 802.15.4 2.4~2.485Ghz
Zigbee 3.0



Smart Multi-Mode Gateway

MZG03

Product specifications

Appearance size :60*60*15mm
Weight: Net Weight 32g
Status indicator :2 LED (Wi-Fi/Zigbee/Bluetooth)
Operation buttons :1 button (reset)
Power supply :MicroUSB DC5V
Working current :<1A
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
Hardware interface :1 Micro-USB
Wireless technology
IEEE 802.15.4 2.4~2.485Ghz
Zigbee 3.0 / BLE5.0



Smart Zigbee LAN Gateway

MZG02

Product specifications

Appearance size :92*92*25.5mm
Weight: Net Weight 100g
Status indicator :4 LED (Green)
Operation buttons :2 button (reset)
Power supply :MicroUSB DC5V
Working current :<1A
Adapter :110V ~ 240VAC, 5V/1ADC
Working Voltage: 1.8V ~ 3.3V
Working temperature : -10-55°C
Working humidity :10%-90%RH(Non-condensing)
Storage temperature : -20-60°C
Storage humidity :5%-90%RH(Non-condensing)
Hardware interface :Micro-USB, 1 LAN Interface
Wireless technology
IEEE 802.15.4 2.4~2.485Ghz

Someone passed, get mobile notification

Arm the detector, the sensor detects that someone has passed, send the alarm alert to your mobile in real time.



Someone passed, light turn on

Work together with smart switch, it automatically lights up when people pass, convenient and saves electricity!



High-decibel audio alarm

The high-decibel alarm scares off the intruder




Real-time monitoring with smart camera

After detecting someone passing, the camera 360° real-time video can watch the monitoring screen in real time through the mobile APP.



IP65 Waterproof Level

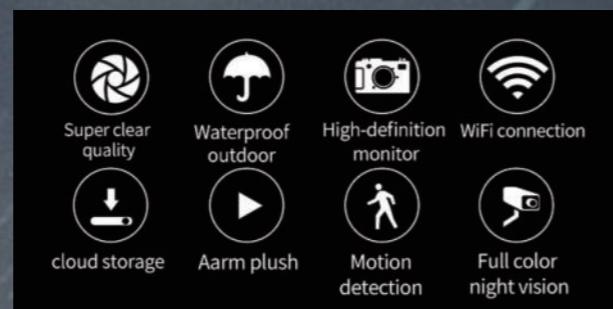

MTYP2

Smart Wireless Camera

IP65 Series



MTYT8



MTYD6

Features:

- *H.265 compression format, real-time monitoring and high-definition
- *Dual Light PCB designed, Two way Audio, Full color night Vision
- *3.0MP real-time image transmission, adaptive network, smooth experience
- *up to 25 frames per second
- *Echo cancellation and noise suppression technology, perfect full-duplex voice effect
- *With Amazon cloud penetration technology, one-key remote, plug and play

Intelligent Mobile Tracking

—MOBILE TRACKING—

Intelligent recognition of the human body, detect the dynamic lens automatic tracking






Smart HD Camera

Multiple Storage Methods

MSHDC-02

1080P PTZ Smart WiFi Camera

1080P HD Quality

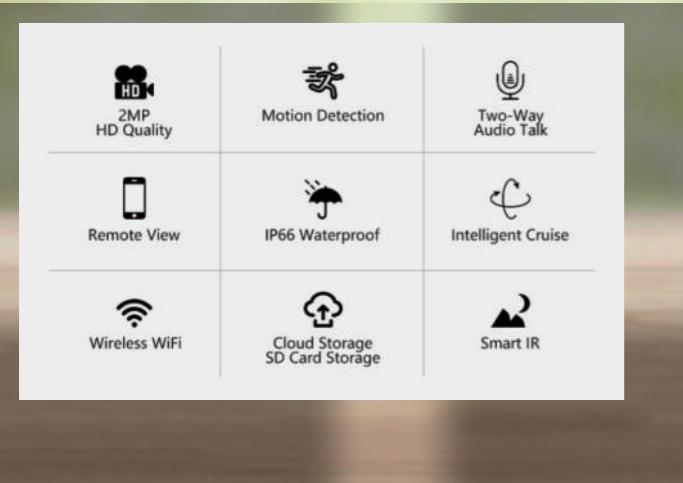

SHDC-02

Features:

- * 1080P PTZ smart camera
- * Support WIFI function, 2dB antenna
- * Two-way voice intercom function
- * Excellent Adaptive Night Vision Automatic Function
- * 15m infrared night vision, low light environment, details are clearly visible
- * 360° full viewing angle, pan/tilt function, horizontal 355°, vertical 100° flexible rotation
- * Support automatic/alarm/timed recording
- * Humanoid automatic tracking function
- * Support multi-terminal real-time viewing
- * Support online operations on major platforms, support



Support up to 128G TF card



Device activity video can be stored in the cloud and viewed anytime, anywhere



Support onvif protocol






Smart HD Camera

MSHDC-04

HD Quality

1080P PTZ Smart WiFi Camera

1080P HD Quality

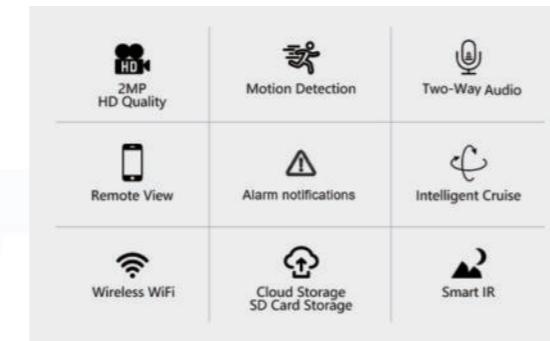

Description:

- * Two-way intercom
- * wireless intelligent connection
- * 360-degree HD monitoring
- * Motion detection, intelligent alarm
- * Professional infrared filling lamp system
- * Support 2 million night vision lenses, 2 million high resolution images, fine texture
- * Focal length 3.6mm, daytime visible range of 30m, night vision range of 20m
- * Intelligent qos algorithm automatically adjusts bit stream and frame rate, adaptive network, bringing perfect video experience
- * Support tf card storage, the maximum memory expansion to 128G, can be played at any time, video editing





Smart HD Camera

E27 Camera

HD Quality

WiFi 360 Panoramic
Light Culb Camera



MTYP2V

Features:


- *Simple installation, E27 lamp holder can work;
- *360 degree panoramic picture, the picture can change the angle arbitrarily;
- * Million pixels, h.265 compressed format;
- *Duplex call, humanoid trigger alarm
- *Support 4x digital zoom



MTYP5V

Features:

- *Simple installation, E27 lamp holder can work;
- *360 degree panoramic picture, the picture can change the angle arbitrarily;
- * Million pixels, h.264 compressed format;
- *Duplex call, humanoid trigger alarm
- *Support 4x digital zoom



Smart HD Camera

Smart HD Camera



MTYS2-k01

Features:

- *1920X1080P
- * H.264 compressed format
- * 5meter visual range
- * 100 degree panoramic picture



MTYP5D

Features:

- *1920X1080P
- * H.265 compressed format
- * Support 16x digital zoom
- * 10 meter visual range
- * 355 degree panoramic picture
- * Size:115X68.5mm



Smart Solar Camera



MTYS10

- * Solar panel universal adjustment, built-in super capacity battery
- * Ultra-low power standby, quick wake up in 0.2 seconds
- * PIR sensor + radar dual alarm detection
- * High-performance ISP and 1/2.7" progressive sensor, blacklight full color
- * 1920*1080P HD video
- * Built-in microphone and loudspeaker, support two way audio
- * Support Cloud storage and local storage
- * APP support Android/IOS
- * IP65 waterproof
- * Support All-in-One installation and separated installation



MTPP6

- *Full HD 1080p Battery Powered Security Camera with PIR Sensor (with Solar Panel for Continuous Power Charging Outdoor)
- *The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- * T21Z Chipset, More functions and lower power consumption
- * Infrared night vision, guarding family safety 24 hours a day
- * Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- * 2pcs 18650 rechargeable batteries, standby for up to 6 months
- * 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- * LinUX operating system, start faster, run more stable
- * Wi-Fi/AP connection, no wiring required
- * HD 2.0MP image sensors for recording clear dynamics
- * Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- * Support iOS and Android systems



MIPC216

- * Ip 66
- * 1080p Wifi Waterproof Bullet Solar Panel
- * Charging Metal Camera
- * Real Time Message Push
- * Rechargeable Solar Panel With 4pcs 18650 Batteries
- * Standby 4-6 Months
- * 6w Solar Board



MSZ01

- * HD 2 million pixel CMOS image sensor, which has good low illumination effect and high image definition.
- * Support 2.0MP (1920*1080P) HD resolution.
- * Support IR-CUT day and night switching, support day and night full color, APP free switching.
- * Support phone wake-up and PIR wake-up.
- * Support two-way voice intercom.
- * Support SD card storage, cloud storage, video query playback.
- * Support device sharing .
- * Its own intelligent detection algorithm effectively reduces false alarms.
- * The device configuration can be realized in only 2 steps.
- * The fastest time to wake up to see the image can be within 3 seconds, and the message will be pushed within 1 second.



Features:

- 1080P And 3MP HD Camera
- 3.6mm lens 100° view angle
- Build in 6pcs LEDS IR Distance 5M
- Pan 355° Tilt 80°
- Support Remote play Lullaby, build in 6 lullabies
- Support Temperature Detection
- Support Baby Cry Detection
- Support Two way audio communication
- Support 802.11b/g/n 2.4G Wifi
- Support Cloud storage or max 128GB TF card



1080P Low-power Solar Battery Outdoor Camera

Tuya / onecam App




WIFI

Wireless
Wiring-free
Long standby



Smart Solar Camera

TP-P6T

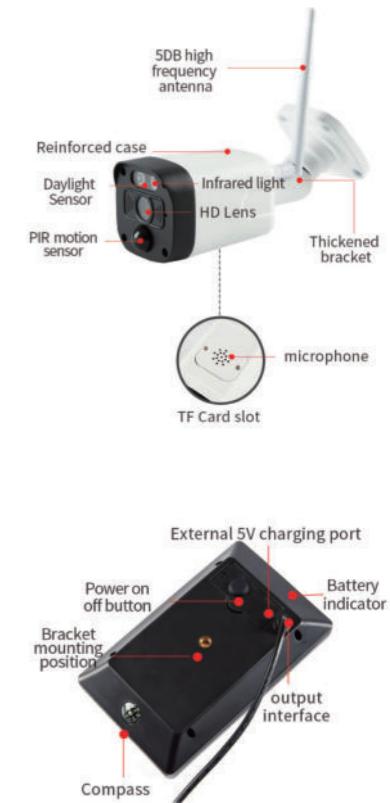

Features:

- * Full HD 1080p Battery Powered Security Camera with PIR Sensor
- * The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- * T21Z Chipset, More functions and lower power consumption
- * Infrared night vision, guarding family safety 24 hours a day
- * Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- * 2pcs 18650 rechargeable batteries, standby for up to 6 months
- * 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- * LinUX operating system, start faster, run more stable
- * Wi-Fi/AP connection, no wiring required
- * HD 2.0MP image sensors for recording clear dynamics
- * Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- * Support iOS and Android systems







Smart HD Camera

TP-TYP5-Y



Features:

Simple installation, E27 lamp holder can work;
360 degree panoramic picture, the picture can change the angle arbitrarily;
2 million and 3 million pixels, h.265 compressed format;
3. Duplex call, humanoid trigger alarm
Support 4x digital zoom

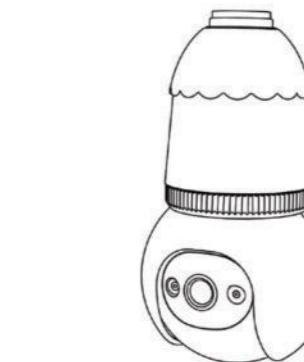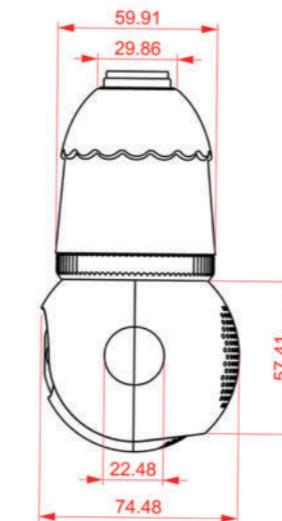



Features:

2.0MP WIFI camera
 Support WIFI function, 2dB antenna
 Two-way voice intercom function
 Excellent adaptive night vision automatic function(Support manual adjustment)
 20m infrared night vision, low light environment, details are clearly visible
 Support automatic/alarm/timed recording
 Support multi-terminal real-time viewing
 Support online operations on major platforms, support screen drag, rotate and other operations
 Support TF card slot (TF card not included)



Technical Parameter			
Platform Support	Android, iOS	Camera Resolution	2.0MP
Transfer Method	2.4G (WIFI)	WIFI Bandwidth	20Mhz(Standard)
TF Card	Max 128G	Camera Power Consumption	Support
Night Vision Distance	20m	Cloud	Support
Audio Codec	G.711A	Audio Input	Built-in Microphone
Audio Output	Built-in Speaker	Intercom	Support
Light Detection	CDS	Capture	Support
Alarm Function	Support	Wattage	4W
Material	PC+ABS	Operating Temperature	-20~+85°C
Power Consumption	Max 2.5W	Product Size	150*155*115mm(L*W*T)



Smart HD Camera

ODC-28B

HD Quality



Features:

- 2.0MP WIFI camera
- Support WIFI function,
- Two-way voice intercom function
function(Support manual adjustment)
- details are clearly visible
- Support automatic/alarm/timed recording
- Support TF card slot (TF card not included)
- Support cloud storage





Electricity Monitoring



Remote Control



Voice Control



Set Schedule




Electricity Monitoring

Surge Protection

No Hub Required

Device Sharing

Individually controlled
sockets

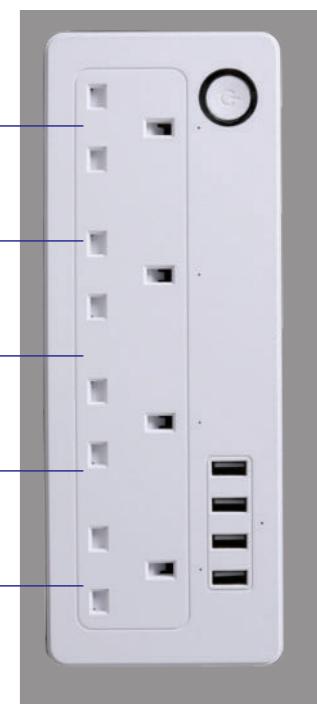



Smart Power Strip

G410

European Type
4 plus Extension Lead



ios Android





- Electricity Monitoring
- Surge Protection
- No Hub Required
- Device Sharing
- Individually controlled sockets

- Remote Control
- Voice Control
- Set Schedule
- Electricity Monitoring





Smart Life Tuya Amazon Alexa Google Assistant

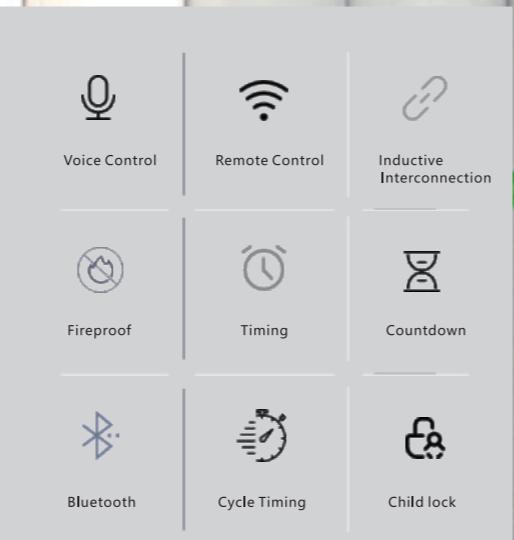

Smart Power Strip

Model:U412-4U

American Type

4 plus Extension Lead

Size:335 x31 x65mm



Model:U601-3U

American Type

6 plus Extension Lead

Size:226x90 x30mm



Model:U401-3U

Universal Type

4 plus Extension Lead

Size:290x65 x42mm





Smart Power Strip



CLY902W-GE

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Size: 295 * 57 * 41MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control



CLY902WUM-GE

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Charging port output: Max 5V, 2.4A
- *Size: 295 * 57 * 41MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *2 USB interfaces+1 TYPE-C interface
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control+charging port control
- *With power metering and electricity fee statistics function



Smart Power Strip




CLY903W-FR


- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Size: 295 * 57 * 41MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control

CLY903WUM-FR

- *Maximum load current: 13A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Charging port output: Max 5V, 2.4A
- *Size: 295 * 57 * 41MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *2 USB interfaces+1 TYPE-C interface
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control+charging port control
- *With power metering and electricity fee statistics function



Smart Power Strip

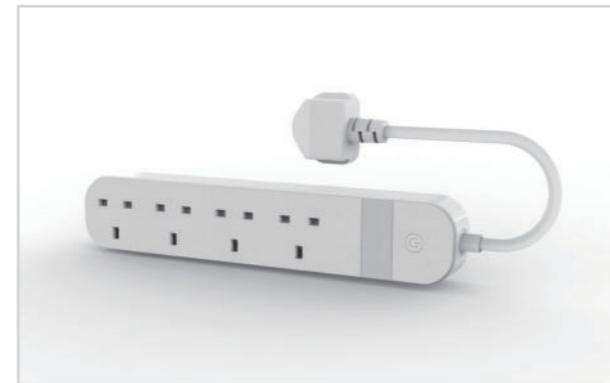

CLY904W-UK

- *Maximum load current: 13A
- *Working voltage: 220-240V
- *Maximum load power: 2990W
- *Wireless network type: Wi Fi 2.4GHz
- *Size: 295 * 57 * 36MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control




CLY904WU-UK

- *Maximum load current: 13A
- *Working voltage: 220-240V
- *Maximum load power: 2990W
- *Wireless network type: Wi Fi 2.4GHz
- *Charging port output: Max 5V, 2.4A
- *Size: 295 * 57 * 36MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *2 USB interfaces+1 TYPE-C interface
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control+charging port control



Smart Power Strip

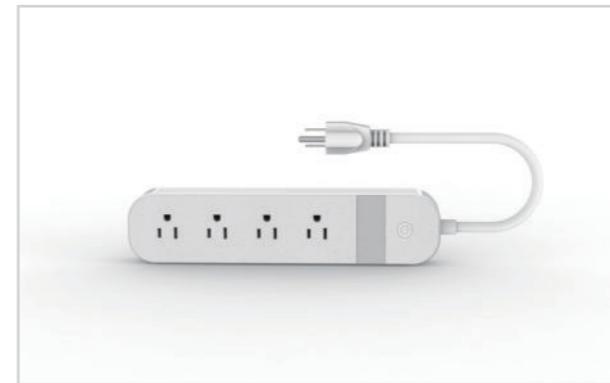

CLY901W-US

- *Maximum load current: 15A
- *Working voltage: 110-130V
- *Maximum load power: 1800W
- *Wireless network type: Wi Fi 2.4GHz
- *Size: 245 * 57 * 32MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Socket holes: 4
- *Wire length: 1.5 meters
- *Control: 4-hole split control




CLY901WUM-US

- *Maximum load current: 15A
- *Working voltage: 110-130V
- *Maximum load power: 1800W
- *Wireless network type: Wi Fi 2.4GHz
- *Charging port output: Max 5V, 2.4A
- *Size: 245 * 57 * 32MM
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *2 USB interfaces+1 TYPE-C interface
- *Socket holes: 4
- *Wire: AWG16 #, 1.5 meters
- *Control: 4-hole split control+charging port control
- *With power metering and electricity fee statistics function



Remote Control

Turn on your water heater in advance, enjoy a lot shower when arrived

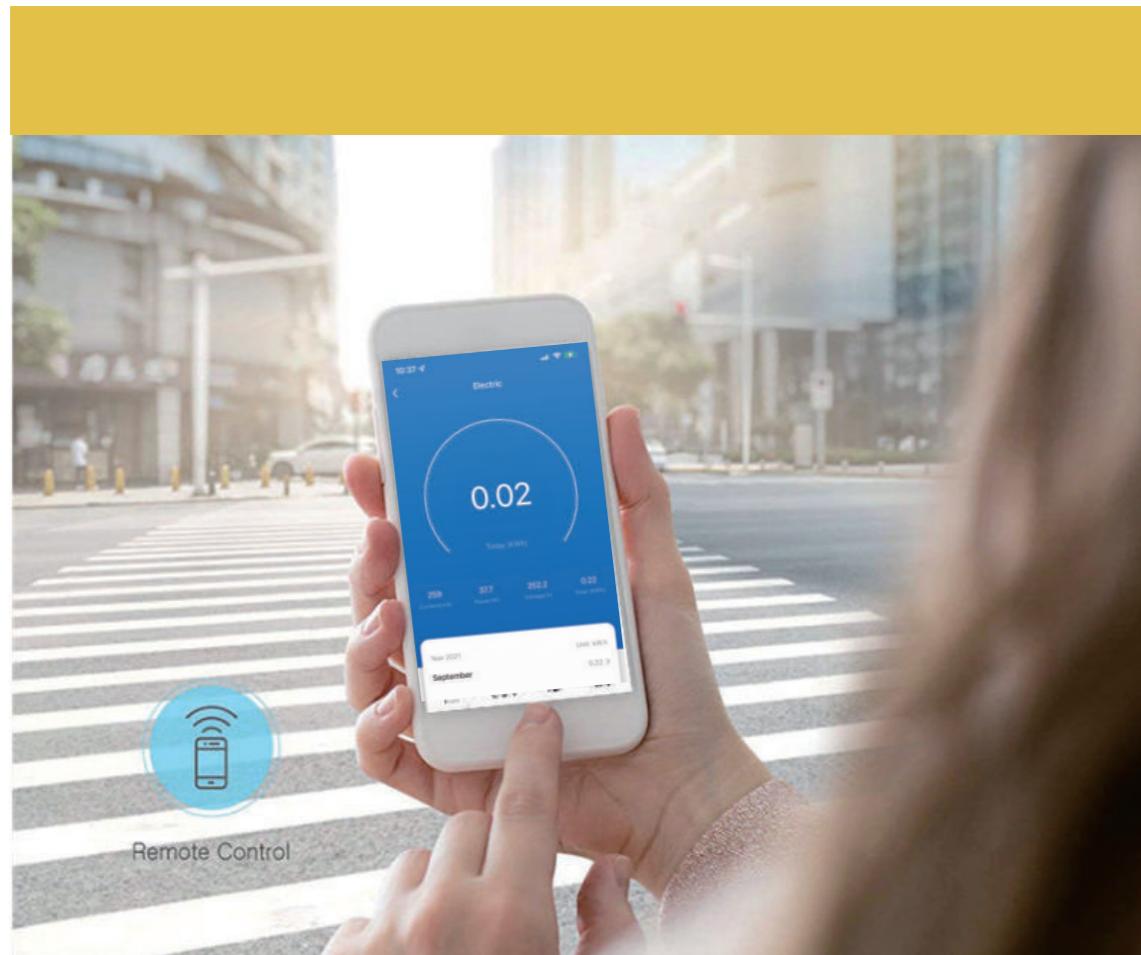

Smart Plug

Smart Plug



M410

American Type Max Power:2200W

Smart Socket

Fire Retardant PC


- *This socket is a 10A wifi smart socket, using the Tuya smart solution.
- *Support smart audio voice control such as Tmall Genie.
- *Mobile phone time delay switch.
- *Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- *The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- *The whole family shares the equipment, multiple users can view at the same time.
- *Can be used for electrical appliances with power below 2200W.
- *Imported fire retardant materials, safe and reliable.



K01-R 10A



K01-T 16A

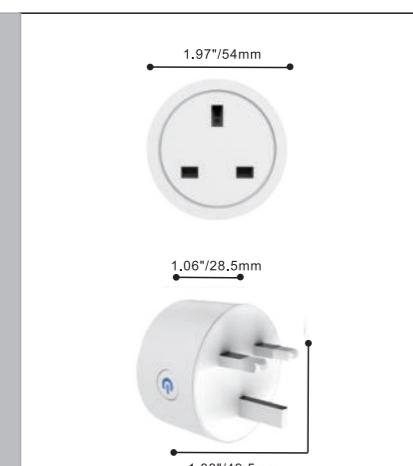




Smart Plug

European Type

Smart Socket

Fire Retardant PC

- *This socket is a 16A wifi smart socket, using the Tuya smart solution.
- *Support smart audio voice control such as Tmall Genie.
- *Mobile phone time delay switch.
- *Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- *The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- *The whole family shares the equipment, multiple users can view at the same time.
- *Can be used for electrical appliances with power below 2200W.
- *Imported fire retardant materials, safe and reliable.

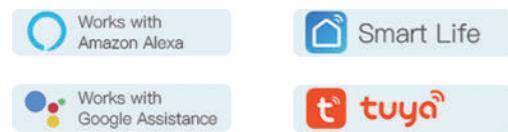

K02-16A

Max Power: 3680W



K03-16A

Input voltage: AC100-240V 50/60Hz
Maximum current: 16A
WIFI standard: 2.4GHz 802.11b/g/n
Surge protect: 140J



CLY809M-GE

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Dual socket holes
- *With power metering and electricity fee statistics function

CLY8101UM-GE

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *USB, TYPE-C output: maximum 5V 2.4A
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *1 USB interfaces+1 TYPE-C interface
- *Socket products and output ports can be intelligently separated and controlled
- *With power metering and electricity fee statistics function





CLY803M-FR

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *With power metering and electricity fee statistics function



CLY811M-FR

- *Maximum load current: 16A
- *Working voltage: 220-240V
- *Maximum load power: 3680W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Dual socket holes
- *With power metering and electricity fee statistics function

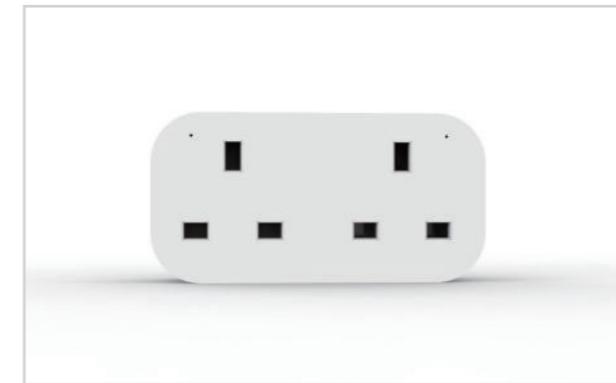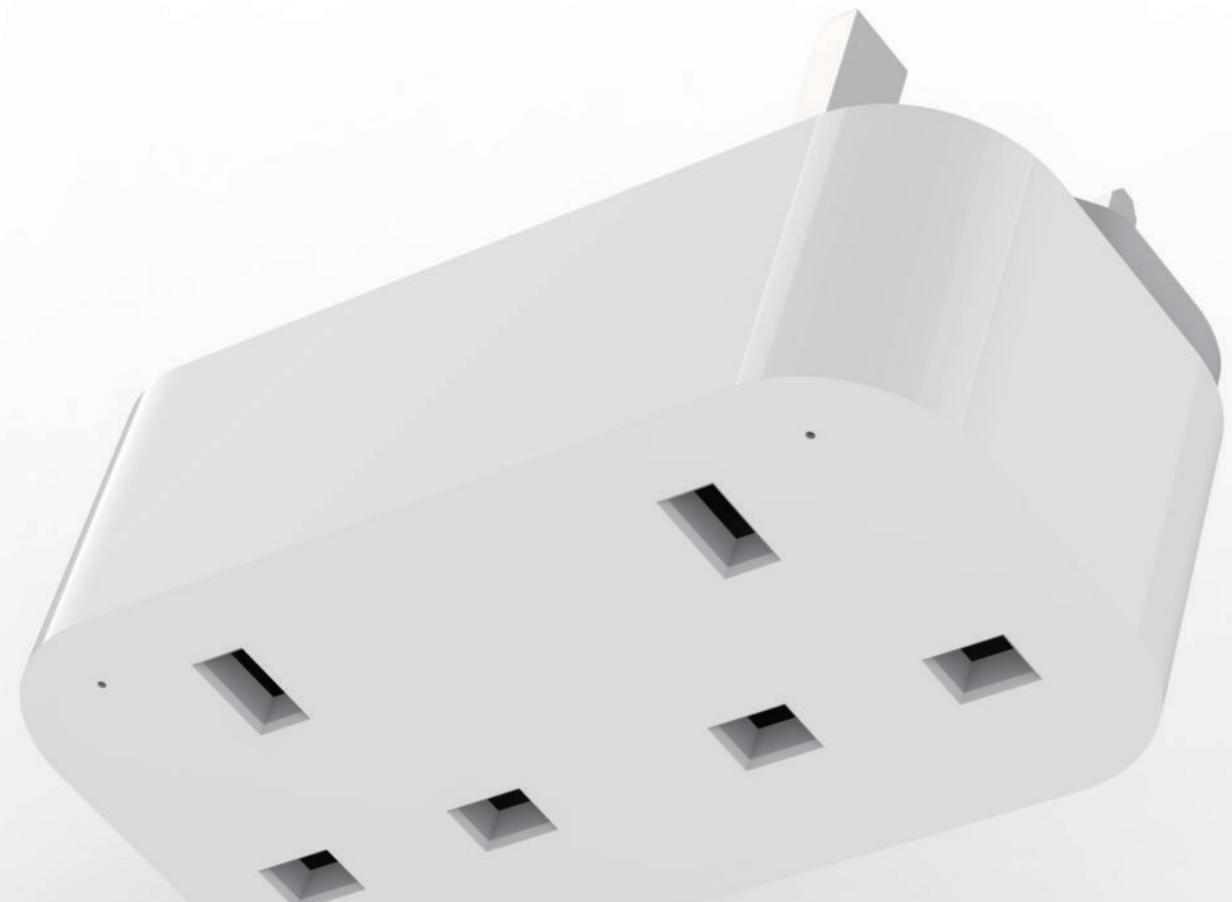

CLY813M-UK


- *Maximum load current: 13A
- *Working voltage: 220-240V
- *Maximum load power: 2990W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Dual socket holes
- *With power metering and electricity fee statistics function

CLY8141U-UK

- *Maximum load current: 13A
- *Working voltage: 220-240V
- *Maximum load power: 3120W
- *Wireless network type: Wi Fi 2.4GHz
- *USB, TYPE-C output: maximum 5V 2.4A
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *1 USB interfaces+1 TYPE-C interface
- *Socket products and output ports can be intelligently separated and controlled



Smart Plug

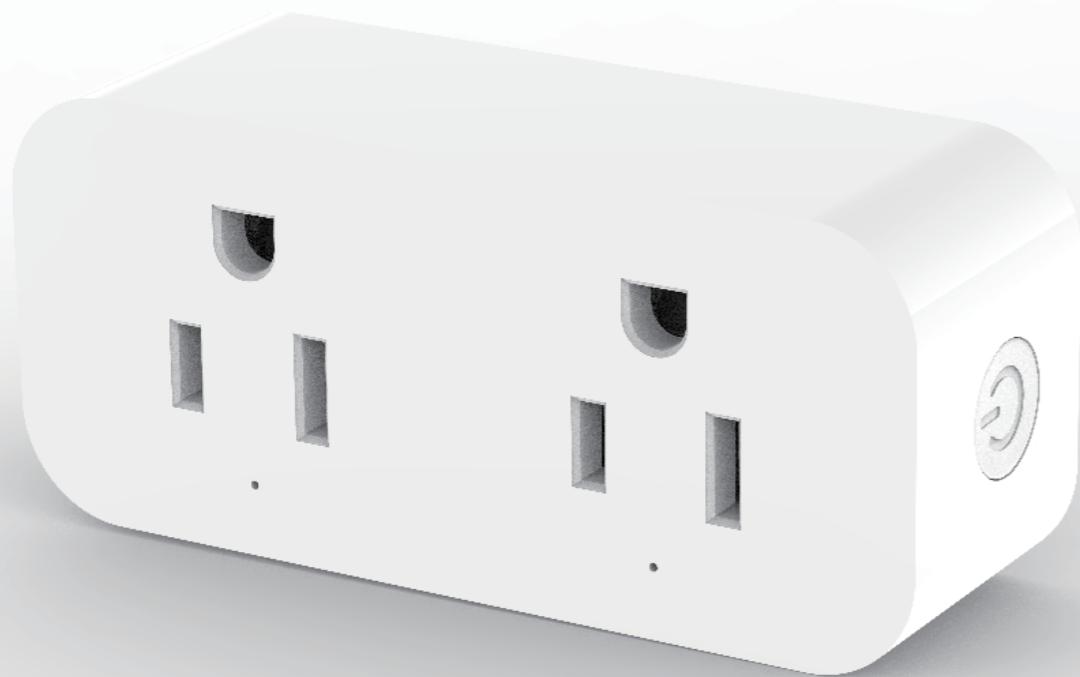

CLY807-US

- *Maximum load current: 15A
- *Working voltage: 110-130V
- *Maximum load power: 1800W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *Dual socket holes



CLY8081U-US

- *Maximum load current: 15A
- *Working voltage: 110-130V
- *Maximum load power: 1800W
- *Wireless network type: Wi Fi 2.4GHz
- *USB, TYPE-C output: maximum 5V 2.4A
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *1 USB interfaces+1 TYPE-C interface
- *Socket products and output ports can be intelligently separated and controlled



Smart Life Tuya Amazon Alexa Google Assistant

Power Monitor WiFi zigbee

Smart Plug



CLY817M-BR (10A)



- *Maximum load current: 10A
- *Working voltage: 110-240V
- *Maximum load power: 2200W
- *Wireless network type: Wi Fi 2.4GHz
- *Graffiti WiFi control
- *Timing and Countdown
- *Voice control
- *With power metering and electricity fee statistics function



Wifi Smart Switches

Timing function

Schedule your Smart Home

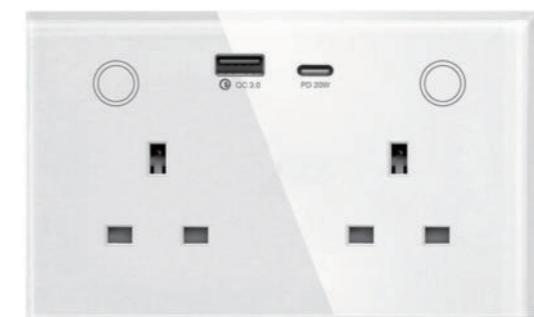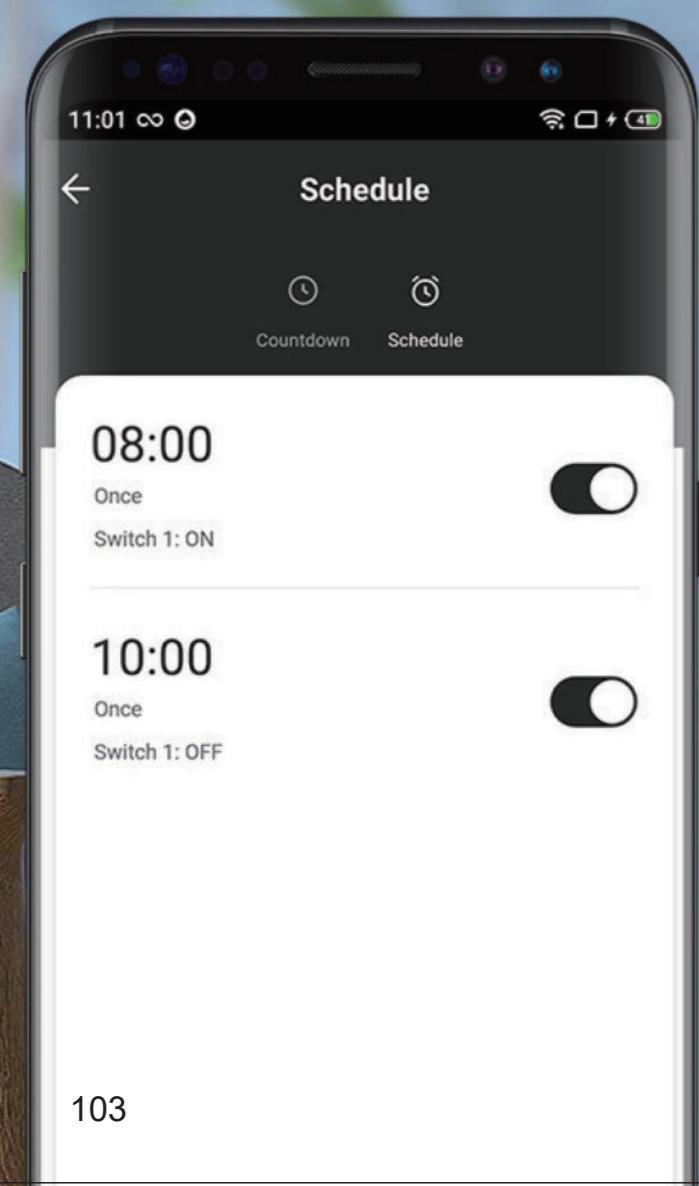


White

Charge PD 20W USB-A:5V
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A



Black

Charge PD 20W USB-A:5V
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

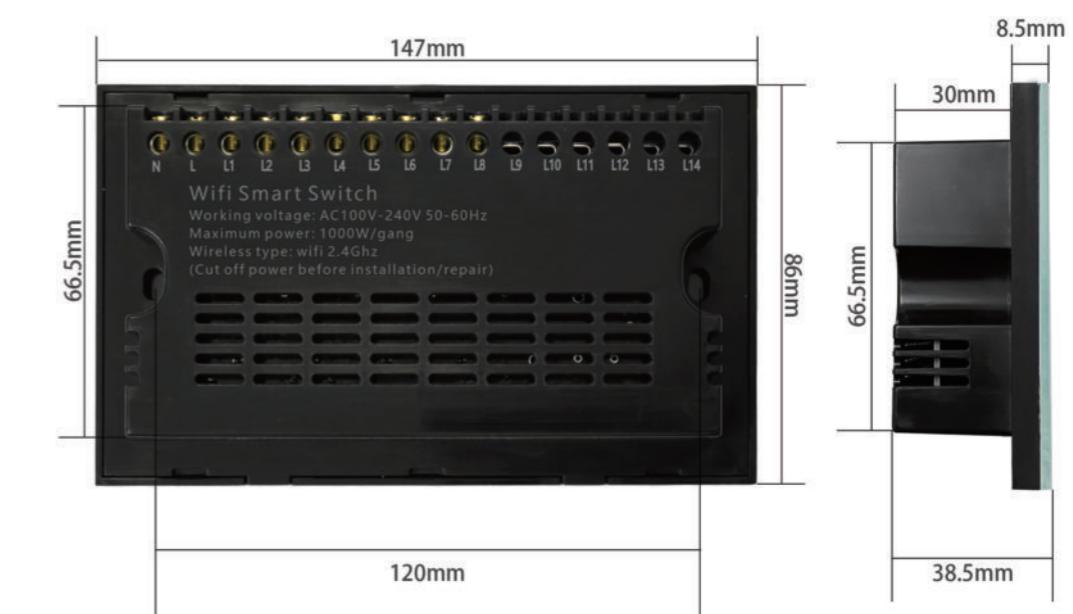




White
Charge PD 20W USB-A:5V
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A




Black
Charge PD 20W USB-A:5V
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

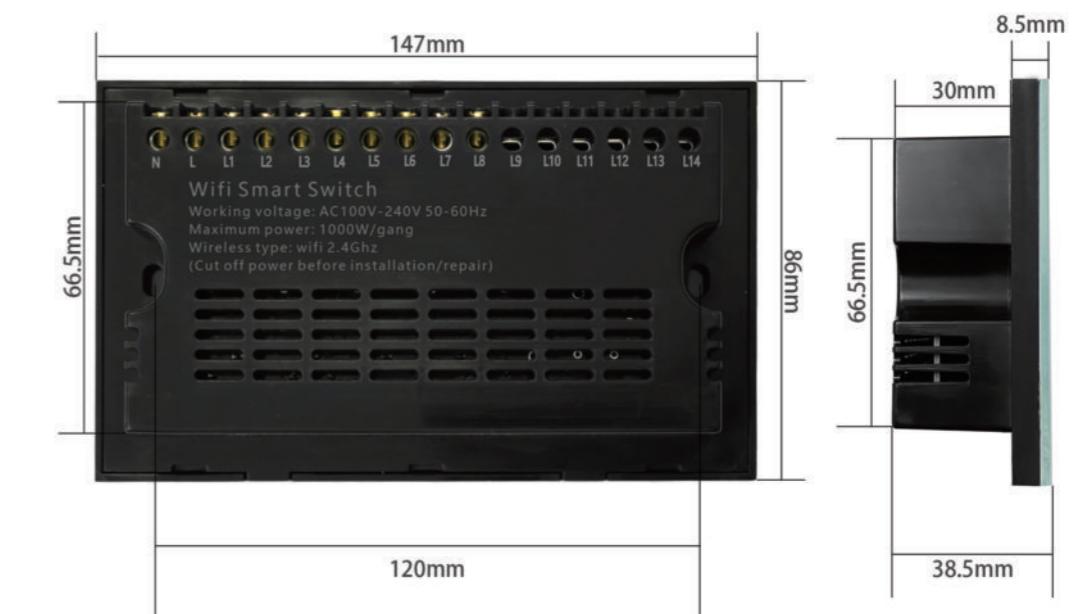




Modular Button Smart Switch

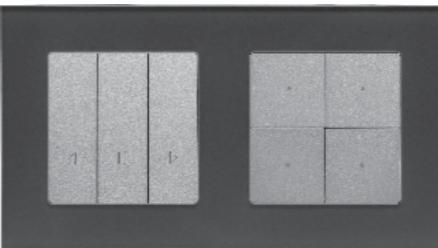


Curtain + 4G

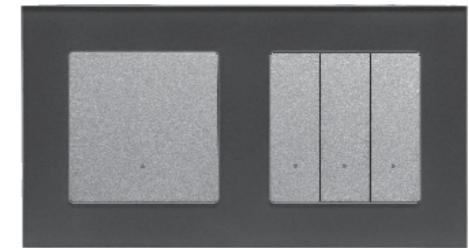


1G + 4G


Modular Button Smart switch



1Gang




2Gang




3Gang



4Gang



Dimmer



Curtain



EU Socket




EU USB + Type C



Wifi Smart Switches

- ◆ Tempered glass panel, easy to clean, non-discoloring, always look as new.
- ◆ Support Alexa and Google Home
- ◆ Socket status indication
- ◆ Memory function
- ◆ Rated load: 13A
- ◆ Color: white, black, gold
- ◆ Support WiFi 2.4G or Zigbee 2.4G
- ◆ Support Alexa and Google Home
- ◆ Suitable for home, office, hotel, hospital and so on
- ◆ Certificate: SAA / CE / RoHS

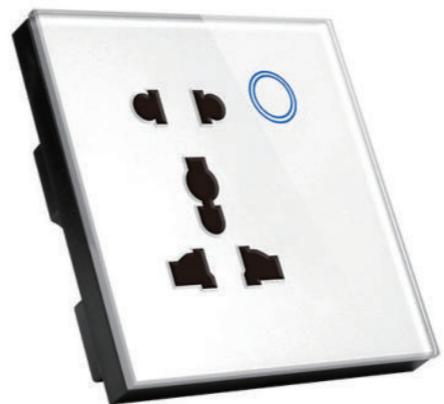

MG-UKWSW



MG-UKWSB


- ◆ Tempered glass panel, easy to clean, non-discoloring, always look as new.
- ◆ Support Alexa and Google Home
- ◆ Socket status indication
- ◆ Memory function
- ◆ Rated load: 13A
- ◆ USB charger: USB 2.0 2.1A
- ◆ Color: white, black, gold
- ◆ Support WiFi 2.4G or Zigbee 2.4G
- ◆ Support Alexa and Google Home
- ◆ Suitable for home, office, hotel, hospital and so on
- ◆ Certificate: CE / RoHS



MG-UKWSU



MG-UKWSU01



Wifi Smart Switches

- ◆ Tempered glass panel, easy to clean, non-discoloring always look as new.
- ◆ Support Alexa and google home
- ◆ Socket status indication
- ◆ Memory function
- ◆ Rated load: 13A
- ◆ QC Output: 5V~3A, 9V~2.22A, 12V~1.67A
- ◆ EN62368-1
- ◆ Color: white, black, gold
- ◆ Support Wifi 2.4G or Zigbee 2.4G
- ◆ Support Alexa and google home
- ◆ Suitable for home, office, hotel, hospital and so on
- ◆ Certificate: CE / RoHS



MG-UKWSPD01



MG-UKWSPD02





Wifi Smart Switches

- ♦High quality crystal tempered glass panel design
- ♦Suitable for home, office, hotel, hospital and so on

Dimension: 86*86*39MM

Operating voltage:110V-240V/50-60HZ

QC Output:5V~3A,9V~2.22A,12V~1.67A

EN62368-1

Rated load:13A

Color: white,black,gold



MG-UKWSUC



MG-UKWSUC01




Wifi Smart Switches US Type





Wifi Smart Switches US Type

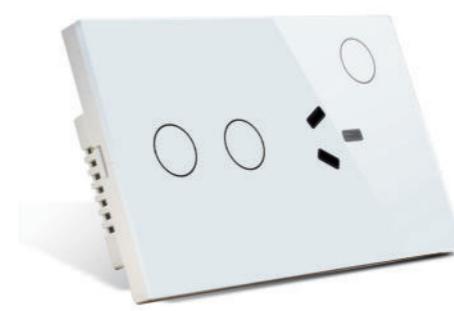



Wifi Smart Switches US Type



Various Styles Choices

Beyond the function, is the aesthetics

